



Drainage Pumps - DL Series

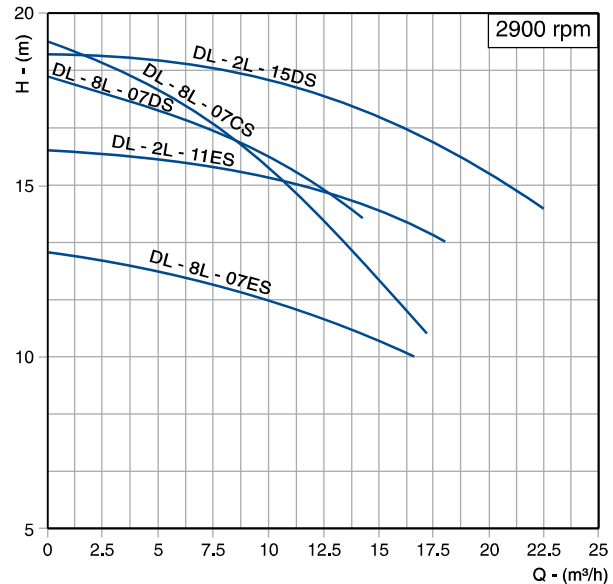

Impeller type	Impeller mtrl.
Closed Multi Channel	Cast Iron / PPO

Performance Curves & Data

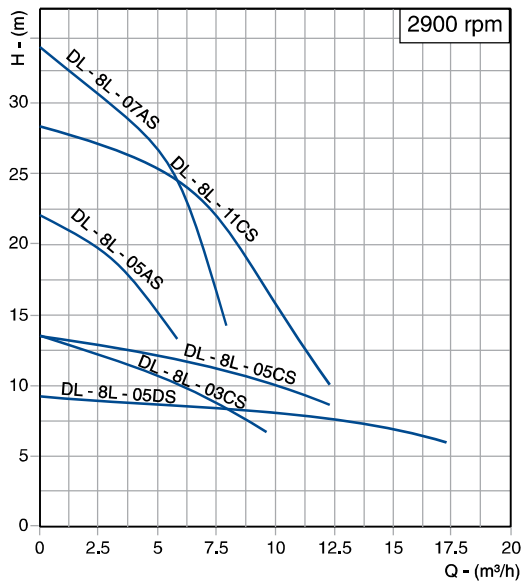

Model		Outlet Size (mm)	Motor Power		Rated Head (m)	Rated Flow (m³/h)	Max. Head (m)	Approx. Weight (kg)
Single Phase	Three Phase		kW	HP				
DL - 8L - 03CS	DL - 8L - 03CT	40	0.37	0.5	10	6	13	12
DL - 8L - 05AS	DL - 8L - 05AT	25	0.55	0.75	19	3	22	15
DL - 8L - 05CS	DL - 8L - 05CT	40	0.55	0.75	10	10	13	16
DL - 8L - 05DS	DL - 8L - 05DT	50	0.55	0.75	7	15	9	16.5
DL - 8L - 07AS	DL - 8L - 07AT	25	0.75	1	27	5	34	17
DL - 8L - 07CS	DL - 8L - 07CT	40	0.75	1	17	7	19	17.5
DL - 8L - 07DS	DL - 8L - 07DT	50	0.75	1	16	10	18	17.5
DL - 8L - 07ES	DL - 8L - 07ET	65	0.75	1	11	15	13	18
DL - 8L - 11CS	DL - 8L - 11CT	40	1.1	1.5	24	6	28	19.5
DL - 2L - 11ES*	DL - 2L - 11ET*	65	1.1	1.5	14.5	15	16	19.5
DL - 2L - 15DS*	DL - 2L - 15DT*	50	1.5	2	17	15	18.5	22

Only single phase pumps are provided with float switch.

* Cast iron impeller.

In view of continuous developments, the information / descriptions / specifications / illustrations are subject to change without notice.

Drainage Pumps - DL Series



DL - 2L - 11FS
DL - 2L - 15FS



DL - 2D - 22FS


DL - 2L - 11FS & DL - 2L - 15FS

Impeller type	Impeller mtrl.
Closed Multi Channel	Cast Iron

DL - 2D - 22FS

Impeller type	Impeller mtrl.
Semi Open Double Channel	Cast Iron

Performance Curves & Data

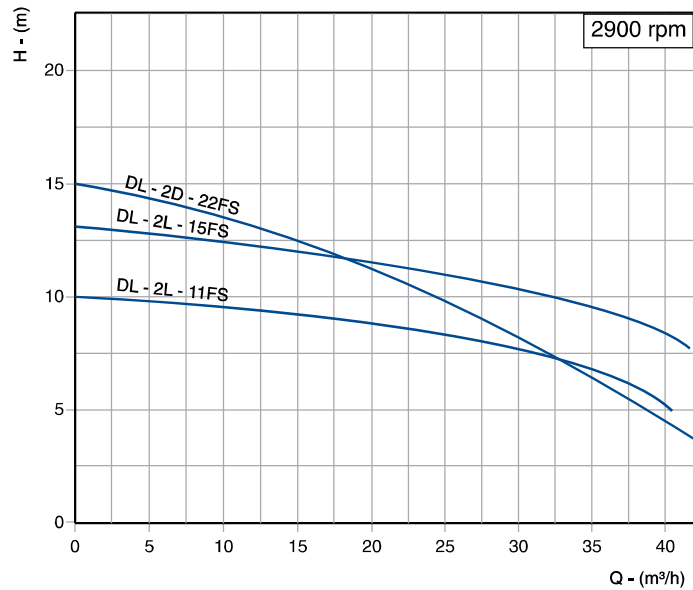

Model		Outlet Size (mm)	Motor Power		Rated Head (m)	Rated Flow (m³/h)	Max. Head (m)	Approx. Weight (kg)
Single Phase	Three Phase		kW	HP				
DL - 2L - 11FS	DL - 2L - 11FT	80	1.1	1.5	7	35	10	21.5
DL - 2L - 15FS	DL - 2L - 15FT	80	1.5	2	9.5	35	13	23.5
DL - 2D - 22FS	DL - 2D - 22FT	80	2.2	3	6.5	35	15	35

Only single phase pumps are provided with float switch.


In view of continuous developments, the information / descriptions / specifications / illustrations are subject to change without notice.

Sewage Pumps - **SL Series**



Impeller type	Impeller mtrl.
Semi Open Double Channel	Cast Iron

Performance Curves & Data

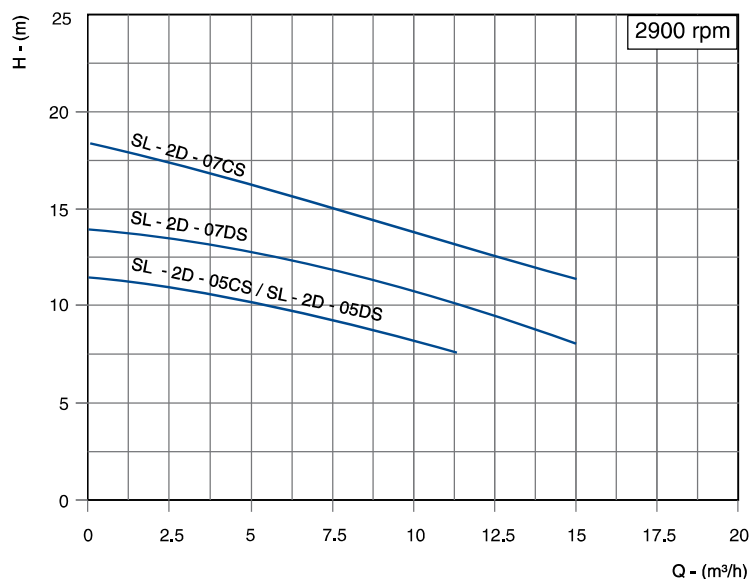

Model	Outlet Size (mm)	Motor Power		Solid Handling Capacity (mm)	Rated Head (m)	Rated Flow (m³/h)	Max. Head (m)	Approx. Weight (kg)
		kW	HP					
SL - 2D - 05CS	40	0.55	0.75	25	8	10	11.5	20.5
SL - 2D - 05DS	50	0.55	0.75	35	8	10	11.5	20.5
SL - 2D - 07CS	40	0.75	1	25	16	6	18	22
SL - 2D - 07DS	50	0.75	1	35	11	10	14	22

The above pump models will be supplied with base plate for proper seating.

In view of continuous developments, the information / descriptions / specifications / illustrations are subject to change without notice.

Sewage Pumps - SL Series




SL - 2N - 11DS

Impeller type	Impeller mtrl.
Semi Open Multi Channel	Cast Iron

SL - 2E - 11DS-H, SL - 2E - 15CS & SL - 2E - 15CS-H

Impeller type	Impeller mtrl.
Closed Double Channel	Cast Iron

Performance Curves & Data

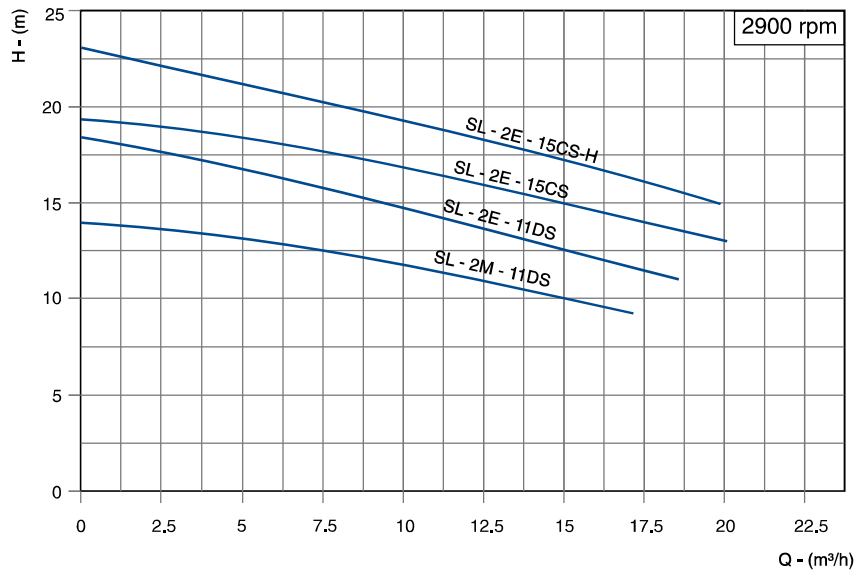

Model		Outlet Size (mm)	Motor Power		Solid Handling Capacity (mm)	Rated Head (m)	Rated Flow (m³/h)	Max. Head (m)	Approx. Weight (kg)	
Single Phase	Three Phase		kW	HP					1Ph	3Ph
SL - 2M - 11DS	SL - 2M - 11DT	50	1.1	1.5	35	10	15	14	24.5	23
SL - 2E - 11DS	SL - 2E - 11DT	50	1.1	1.5	35	16	8	18	24	22.5
SL - 2E - 15CS	SL - 2E - 15CT	40	1.5	2	25	15	15	19	27.5	26
SL - 2E - 15CS-H	SL - 2E - 15CT-H	40	1.5	2	25	20	8	23	27	25.5

The above pump models will be supplied with base plate for proper seating. Only single phase pumps are provided with float switch.

In view of continuous developments, the information / descriptions / specifications / illustrations are subject to change without notice.