

# SILVERLINE SERIES


Nominal Diameter : **4"**

Nominal Flow : **14m<sup>3</sup>/h**

Outlet Size : **2"**

## Performance Table

DIMENSIONS & WEIGHT

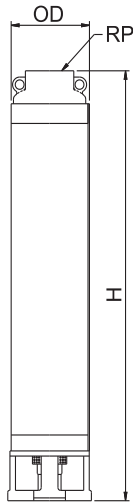

PUMP MODEL	REQUIRED MOTOR POWER		DIMENSIONS (mm)			APPROX NETT. WEIGHT (kg)
	kW	HP	OD	RP	H	
S4P-14/03	0.75	1	98	50	463	2.6
S4P-14/05	1.1	1.5	98	50	610	4.3
S4P-14/07	1.5	2	98	50	775	6.0
S4P-14/10	2.2	3	98	50	1009	8.5
S4P-14/11	2.2	3	98	50	1087	9.7
S4P-14/12	3.0	4	98	50	1165	10.2
S4P-14/13	3.0	4	98	50	1243	11.0
S4P-14/16	3.7	5	98	50	1477	13.6
S4P-14/17	3.7	5	98	50	1555	14.4
S4P-14/22	5.5	7.5	98	50	1945	29.0
S4P-14/24	5.5	7.5	98	50	2101	33.0

PUMP MODEL	MOTOR kW	TOTAL MANOMETRIC HEAD IN METRES - (COLUMN WATER)	lps	0	2.22	2.78	3.33	3.89	4.44	5.00	5.56
			m <sup>3</sup> /h	0	8	10	12	14	16	18	20
S4P-14/03	0.75			17	14	13	12	9	7	-	-
S4P-14/05	1.1		28	24	22	19	16	14	9	6	
S4P-14/07	1.5		38	33	30	26	22	18	14	9	
S4P-14/10	2.2		59	49	45	40	34	29	22	15	
S4P-14/11	2.2		64	59	50	45	39	33	25	17	
S4P-14/12	3		69	59	55	48	43	34	27	18	
S4P-14/13	3		74	65	58	52	44	36	29	20	
S4P-14/16	3.7		89	77	69	62	53	44	34	24	
S4P-14/17	3.7		98	85	77	68	59	49	38	27	
S4P-14/22	5.5		123	104	93	82	70	57	43	29	
S4P-14/24	5.5		134	114	104	92	78	64	49	33	

Note : The mounting dimensions of these pumps are in accordance with Manufacture standards.  
 In view of continuous developments, the information / descriptions / specifications / illustrations are subject to change without notice.

# SILVER LINE SERIES


Nominal Diameter : **4"**

Nominal Flow : **14m<sup>3</sup>/h**

Outlet Size : **2"**

## Performance Curves

Flow Range : 8 - 22 m<sup>3</sup>/h

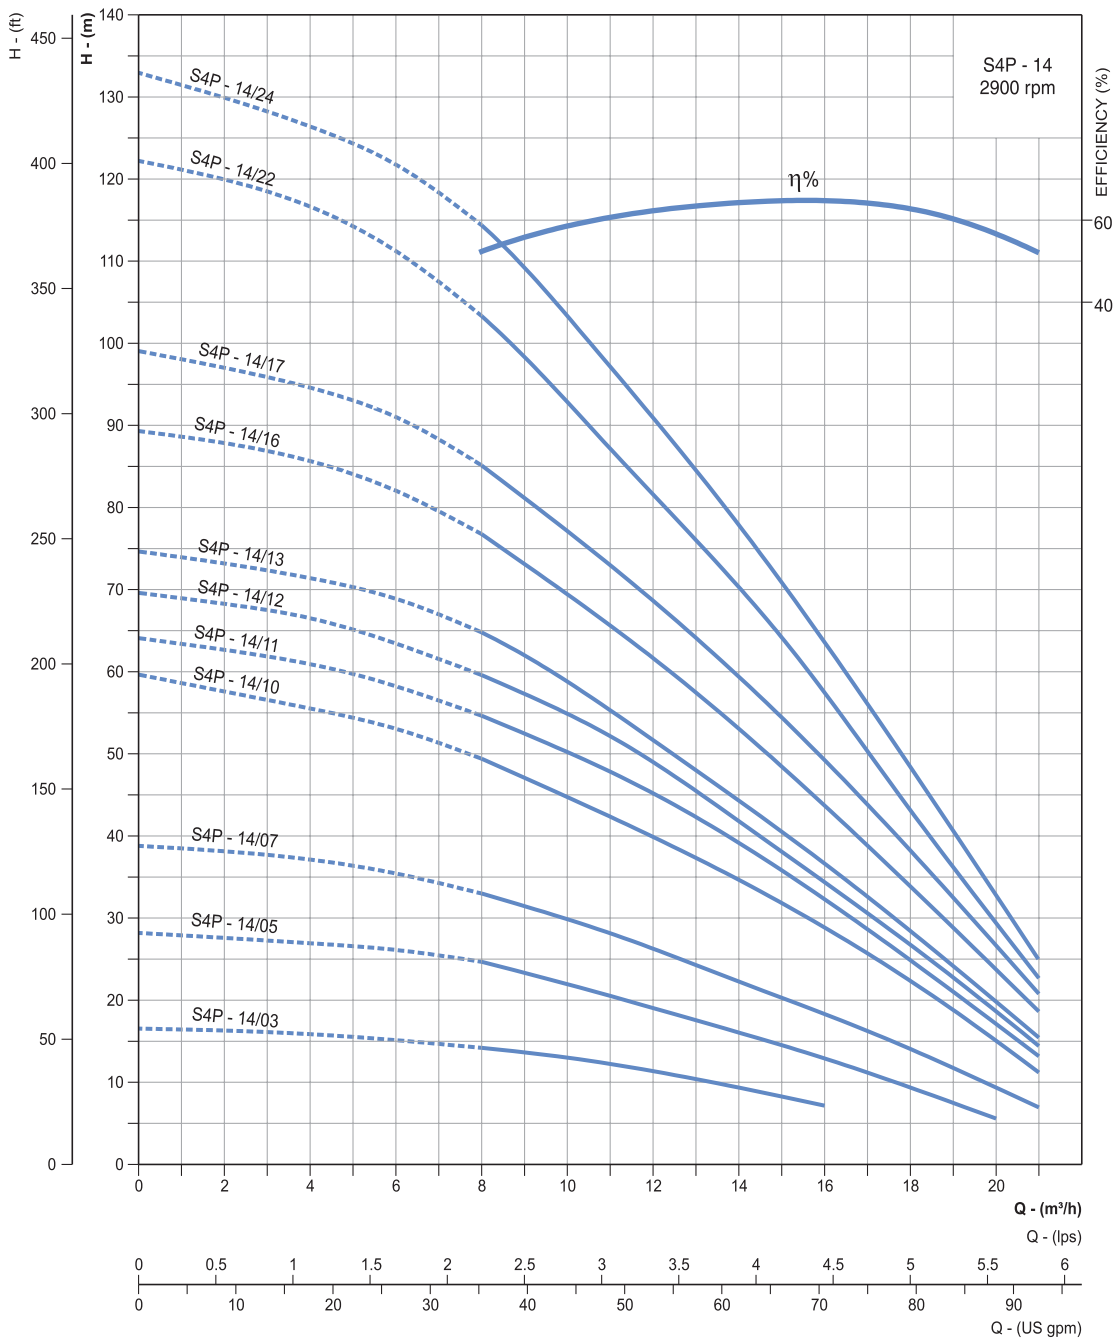

Refer General Information for performance curve conditions and for more details.  
Curve tolerance according to ISO : 9906, Grade - 3B