

SILVERLINE SERIES

FLOATING IMPELLER MODEL


Nominal Diameter : **4"**

Nominal Flow : **4m³/h**

Outlet Size : **1 1/4"**

Performance Table

DIMENSIONS & WEIGHT

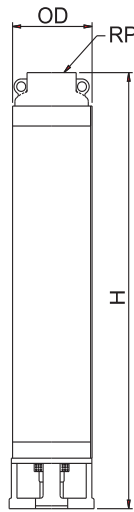

| PUMP MODEL | REQUIRED MOTOR POWER | | DIMENSIONS (mm) | | | APPROX NETT. WEIGHT (kg) |
|------------|----------------------|------|-----------------|----|------|--------------------------|
| | kW | HP | OD | RP | H | |
| S4P-4/05 | 0.55 | 0.75 | 98 | 32 | 383 | 1.9 |
| S4P-4/06 | 0.55 | 0.75 | 98 | 32 | 412 | 2.4 |
| S4P-4/07 | 0.75 | 1 | 98 | 32 | 441 | 3.3 |
| S4P-4/10 | 1.1 | 1.5 | 98 | 32 | 528 | 4.0 |
| S4P-4/11 | 1.1 | 1.5 | 98 | 32 | 557 | 4.4 |
| S4P-4/14 | 1.5 | 2 | 98 | 32 | 674 | 5.6 |
| S4P-4/15 | 1.5 | 2 | 98 | 32 | 703 | 6.0 |
| S4P-4/20 | 2.2 | 3 | 98 | 32 | 860 | 8.0 |
| S4P-4/22 | 2.2 | 3 | 98 | 32 | 918 | 8.8 |
| S4P-4/27 | 3 | 4 | 98 | 32 | 1093 | 10.8 |
| S4P-4/35 | 3.7 | 5 | 98 | 32 | 1325 | 14.0 |

| PUMP MODEL | MOTOR kW | TOTAL MANOMETRIC HEAD IN METRES - (COLUMN WATER) | lps | 0 | 0.55 | 0.83 | 1.11 | 1.39 | 1.66 | 1.80 |
|------------|----------|--|-------------------|-----|------|------|------|------|------|------|
| | | | m ³ /h | 0 | 2 | 3 | 4 | 5 | 6 | 6.5 |
| S4P-4/05 | 0.55 | | | 38 | 32 | 28 | 22 | 15 | 8 | 4 |
| S4P-4/06 | 0.55 | | | 46 | 40 | 37 | 31 | 21 | 12 | 8 |
| S4P-4/07 | 0.75 | | | 54 | 49 | 44 | 37 | 25 | 14 | 9 |
| S4P-4/10 | 1.1 | | | 79 | 69 | 62 | 51 | 39 | 22 | 16 |
| S4P-4/11 | 1.1 | | | 86 | 77 | 72 | 61 | 47 | 29 | 20 |
| S4P-4/14 | 1.5 | | | 110 | 99 | 89 | 73 | 55 | 35 | 26 |
| S4P-4/15 | 1.5 | | | 118 | 108 | 96 | 79 | 60 | 38 | 28 |
| S4P-4/20 | 2.2 | | | 158 | 141 | 128 | 110 | 82 | 49 | 34 |
| S4P-4/22 | 2.2 | | | 185 | 165 | 148 | 128 | 98 | 58 | 40 |
| S4P-4/27 | 3 | | | 210 | 198 | 183 | 159 | 120 | 71 | 44 |
| S4P-4/35 | 3.7 | | | 270 | 248 | 228 | 192 | 140 | 81 | 49 |

SILVER LINE SERIES

FLOATING IMPELLER MODEL


Nominal Diameter : **4"**

Nominal Flow : **4m³/h**

Outlet Size : **1 1/4"**

Performance Curves

Flow Range : 2.5 - 6.5 m³/h

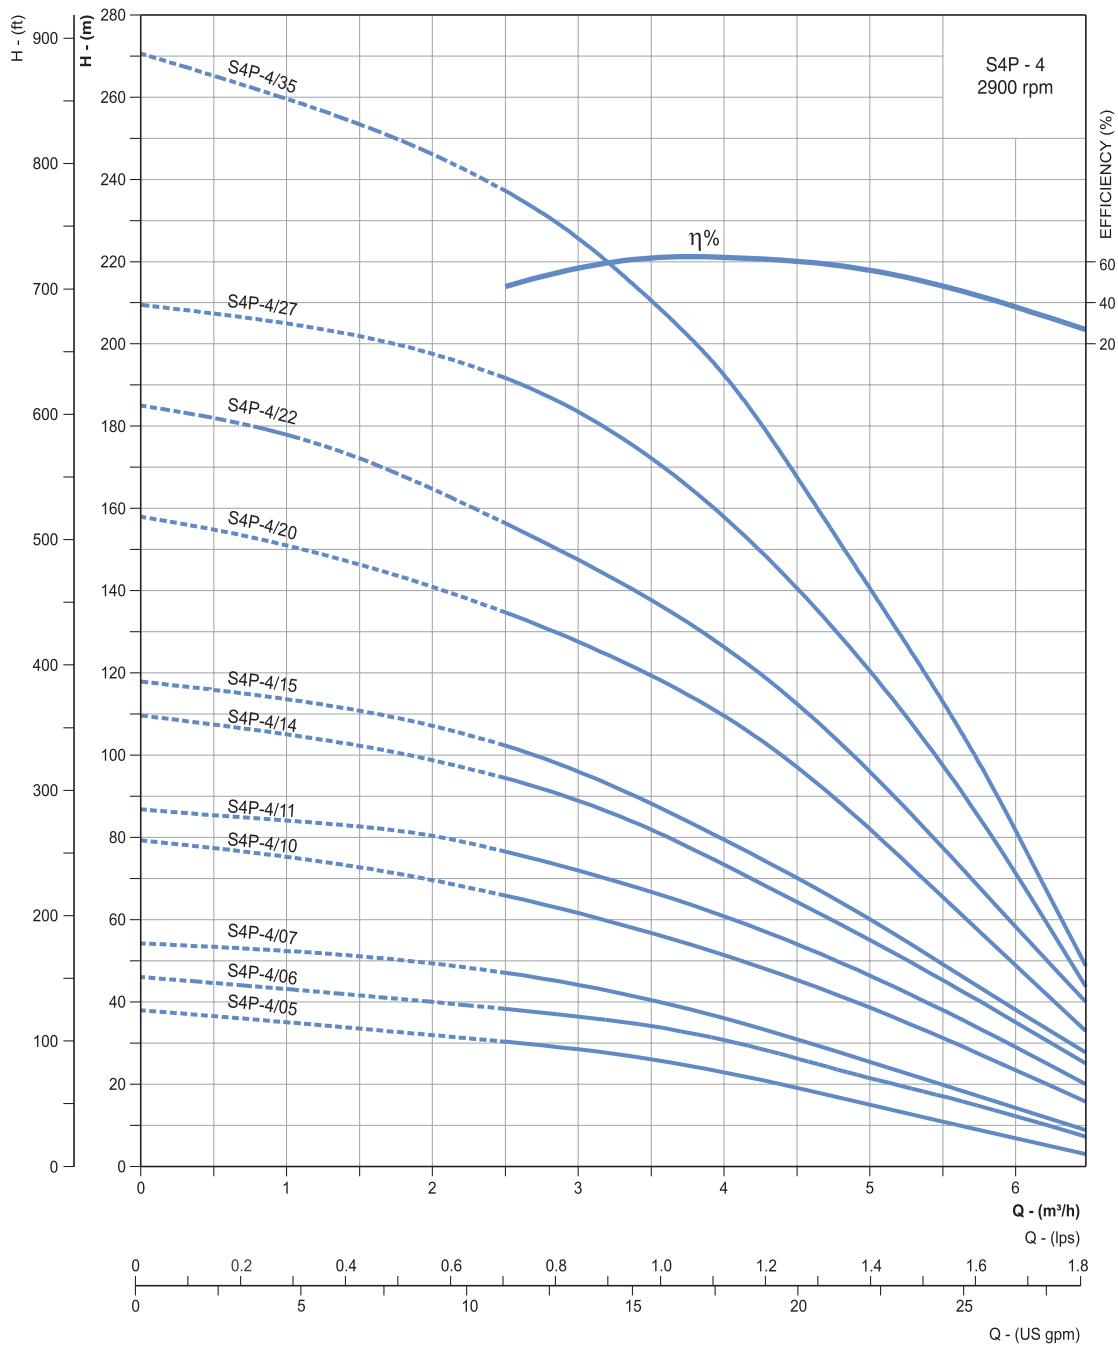

Refer General Information for performance curve conditions and for more details.
Curve tolerance according to ISO : 9906, Grade - 3B